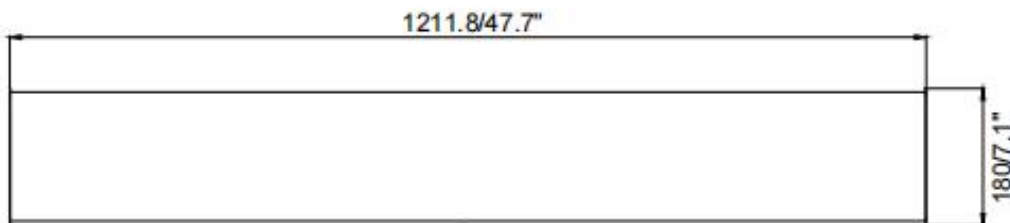


P/N:LW01362-40K

LW01362-50K

**DIMENSIONS****NOTICE FOR USER**

- Please turn off power before install or change assembly parts
 - The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated
 - No-professionals, must not install and disassemble the lamps
- Suitable for damp locations.

ADVANTAGE

- UL cUL certificate
- Internal driver, input voltage AC120-277V 0-10V dimming .
- Long lifespan and good heat dissipation
- Operating ambient temperature can up to 50 degree

APPLICATION

- Office
- Hallways
- Multipurpose rooms
- Conference rooms

SPECIFICATIONS

OPTICAL	Input Power (Tolerance : ±10%)	40W		
	Color Temperature	4000K	5000K	
	Lumen (Tolerance : ±10%)	5240LM	5280	
	Efficacy (Tolerance : ±3%)	130LM/W	130LM/W	
	CRI	>80		
	Color Consistency	<6 Steps (or <6 SDCM)		
	Diffuser Type	PMMA		
	Beam Angle(50%)(Tolerance : ±25%)	100 Degree		
ELECTRICAL	Input Voltage and Frequency	120-277VAC 50/60Hz		
	PF (Tolerance : -3%)	≥0.9		
	THD (Tolerance : +5%)	≤20%		
	Flicker Percent	<5%		
	Driver Surge protection	L-N: 2.5kV		
	Dimmable	0-10V dimming standard		
	Sensor Type	NO		
	Optional Accessory	NO		
	Equivalent	2*32W FL		
MATERIALS	LED Brand	Seoul		
	LED Type	SMD2835		
	LED QTY	168PCS		
	Housing	PC + steel		
	Housing Color	White		
	Waterproof Rating	DAMP		
OTHERS	Operating Temperature	-40°C TO 50°C		
	Storage Temperature	-40°C TO 80°C		
	Operating Humidity	20%-70% RH		
	Storage Humidity	10%-75% RH		
	Warranty Time	5 years		

PACKAGE

	Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
Inner box	1235*186*76 MM	1PCS	2.0KG	3.0 KG
Outer box	1247*325*205MM	4PCS	10.2 KG	12.4KG

Tolerance of Outer Carton Size: ±15 MM, Tolerance of Weight: ±10%.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.