



# LED GARAGE CANOPY



## Features

1. This garage canopy is a special design for application in places like parking garage, car port, driveway, underpass, etc;
2. Fins design, advective grooves between fins are good for heat dissipation;
3. Professional light distribution technique, high light reflectivity reflectors, 155° beam angle available; Light transmission rate of lens is over 90%;
4. It complies with UL, ETL certification, safe and reliable.

## Product Dimension

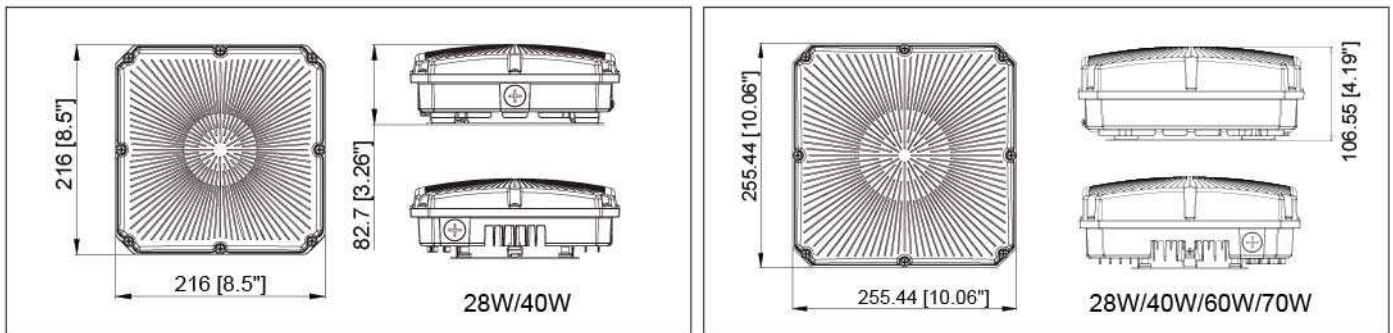

## Lighting Parameters


| Model Number          | TS-GCP1070-70W-G-H-50K                             | TS-GCP1070-70W-G-H-50K(PT) |
|-----------------------|----------------------------------------------------|----------------------------|
| Working Voltage       | AC120-277V                                         |                            |
| CCT                   | 4000K, 5000K, 5700K                                |                            |
| Lamp Bead Model       | LUMILEDS                                           |                            |
| Lighting Efficiency   | 120LM/W                                            |                            |
| Color Rendering Index | Ra>80                                              |                            |
| Operating Temperature | -40°F~104°F                                        |                            |
| Storage Temperature   | -40°F~158°F                                        |                            |
| Environment Location  | Wet Location                                       |                            |
| Life span             | ≥50000H                                            |                            |
| Lamp shell            | Brown                                              |                            |
| Accessories options   | No sensor function, Photocontrol, Microwave sensor |                            |

(XX) can be blank = no sensor function, "MS" = Microwave sensor, "PT" = Photocontrol  
xxK can be any number for color temperature: 40K, 50K, 57K.


## Installation Instruction

### Ceiling Installation


1. Loosen the screw to take off the mounting plate from the lamp.

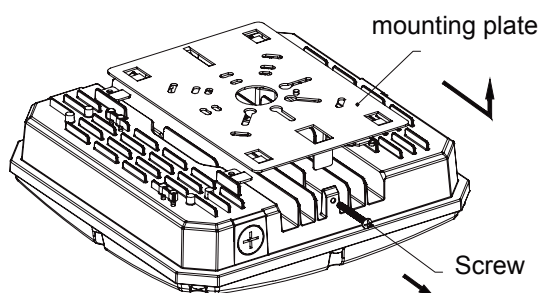

2. Use screws to lock the mounting plate on the embedded junction box.

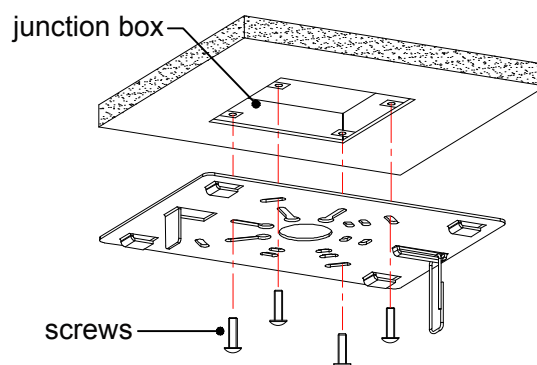


3. Hang the lamp on the ring so as to connect wires with terminal caps.

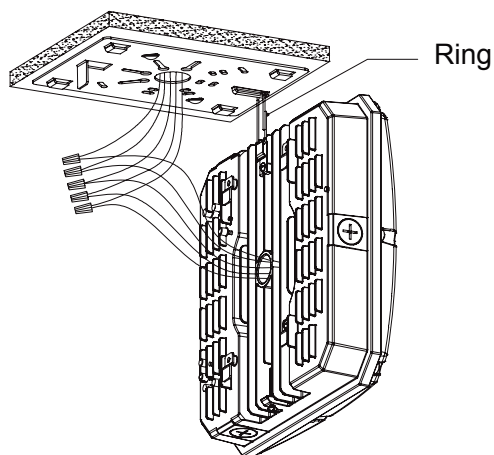


| Input/Dimmer |   | Lamp   |
|--------------|---|--------|
| Green        | ○ | Green  |
| White        | ○ | White  |
| Black        | ○ | Black  |
| Dim-         | ○ | Pink   |
| Dim+         | ○ | Purple |

*this connection can be omitted if with non-dim driver*

4. Hook up lamp on the mounting plate.

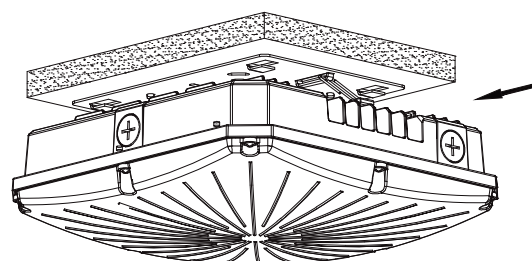


5. Secure the screw. Installation completed.

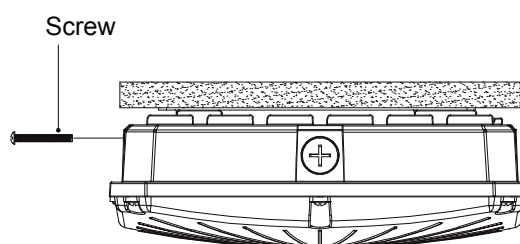


## Installation Instruction

### Pole-pendant Installation

1. Connecting wires with terminal caps as picture shows.

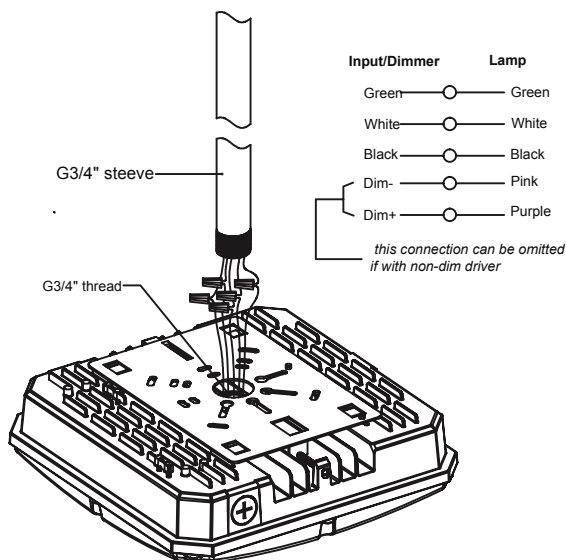

2. Rotating the steeve to make it fixed with lamp. Installation completed.

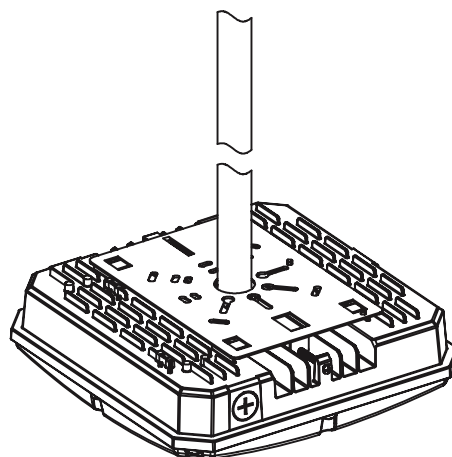

## Packing infomation

| Power (Size)    | Innter box (L*W*H)                    | Outer box (L*W*H)                       | Qty/Ctn (pcs) | N.W./Ctn (kg/lbs) | G.W./Ctn (kg/lbs) |
|-----------------|---------------------------------------|-----------------------------------------|---------------|-------------------|-------------------|
| 8.5 inch 28W    | 10.39''*4.4''*10.5''<br>264*112*266mm | 21.46''*18.43''*11.4''<br>545*468*290mm | 6             | 9.36/20.64        | 11.23/24.75       |
| 8.5 inch 40W    |                                       |                                         | 6             | 9.72/21.43        | 11.47/25.28       |
| 10 inch 28W/40W | 11.89''*4.65''*12''<br>302*118*305mm  | 19.49''*12.48''*12.8''<br>495*317*325mm | 4             | 9.09/20.03        | 10.26/22.63       |
| 10 inch 60W/70W |                                       |                                         | 4             | 10.28/22.68       | 11.47/25.28       |

## Applications



## Cautions

1. Only persons qualified for electrical work should carry out electrical work.
2. All wiring should be performed after shutting off electricity or power to the lighting fixture.
3. Do Not disassemble or modify the LED CANOPY LIGHT.
4. Do Not drop the LED CANOPY LIGHT. Take precautions to ensure the LED CANOPY LIGHT does not experience any strong impact.
5. Keep this product Manual in a safe place for reference.
6. The manufacturer and/or the seller will not be held responsible for any damage caused to the LED CANOPY LIGHT by the user(s) during installation .
7. Be sure to ground the fixture.
8. Do Not Handle lamps soon after the light has been turned off.
9. Do Not use the LED CANOPY LIGHT near heating appliances/elements.